



Screw Disconnect Terminal Blocks



CTR 2.5

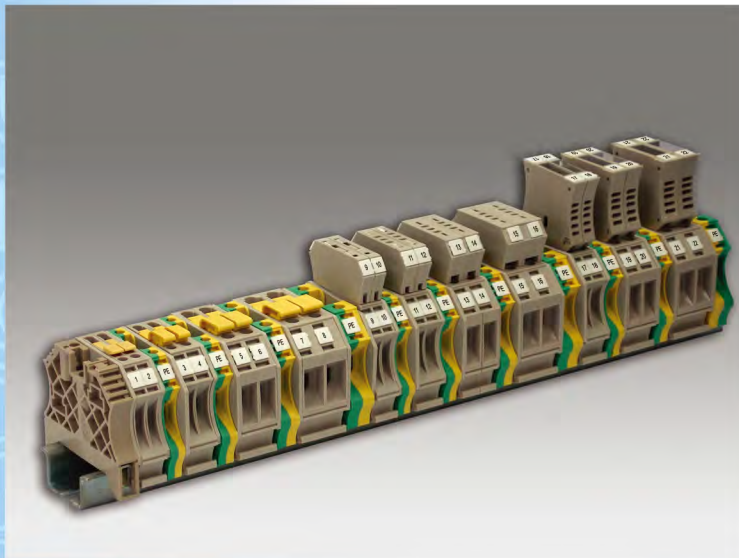






Features of Disconnect Terminal Blocks (CTR2.5/4/6/10)


- High current carrying capacity up to 15A .
- Space – saving design.
- Installing terminal plug easily and quickly on the terminal rails(Ease of circuit testing & diagnosis).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

分離型(內接短路片)接線座之特性 (CTR2.5/4/6/10)


- 高電流承載能力
- 節省空間之設計
- 端子插頭安裝及更換容易(有利於測試及診斷)
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

| Specifications (產品規格) | 2.5 mm ² | |
|--|--|------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | |
| UL | cUL [®] 600 V/12 A/AWG 12-22 | |
| CSA | 600 V/12 A/AWG 12-22 | |
| IEC | 500 V/15 A/0.5~2.5mm ² | |
| Insulating impulse voltage withstand (額定衝擊電壓) | 6 KV | |
| Torque (lb-in) (扭緊力矩) | 4.5 | |
| Clamping Screw (M) (螺絲) | M3 | |
| Insulation stripping length(mm) (剝線長度) | 10-12 mm | |
| Material/Available Color (材質顏色) | Beige | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | |
| For TS35x7.5  | 5 x 60 x 47.5 | |
| For TS35x15  | 5 x 60 x 55 | |
| Accessories (附件) | Cat. No. | Qty. |
| End Bracket (終端擋板) | SEW35 | 50 |
| | CEW35/2 | 50 |
| End Plate (擋板) | CEP 1 | 50 |
| Partition (擋板/隔片) | CEP 5 | 50 |
| | CQB 2.5/2 | 50 |
| Comb Link (邊接式聯接件) | CQB 2.5/3 | 50 |
| | CQB 2.5/10 | 20 |
| | W5 W5Z W5K | 500 |
| Marking Tags (標記號) | W7 W7Z W7K | 400 |
| | TPS2.0 (Ø2) | 20 |
| Test plug (測試插頭) | TPS2.3 (Ø2.3) | 20 |
| | TP2.0 | 50 |
| Socket (測試插孔) | TP2.3 | 50 |
| | CSD2.5 | 25 |
| Diode Plug (二極體插頭) | +  - | 25 |
| | -  + | 25 |
| LED Fuse Type (顯示型保險絲插座) Insert  | | |
| Protection Cover (防觸蓋) | DP1 | 20 |
| Retaining Plates (扣板/中界板) | AD1 | 50 |
| Tool (工具) | DS3 | |


CTR 2.5D




CTR 4



CTR 4D

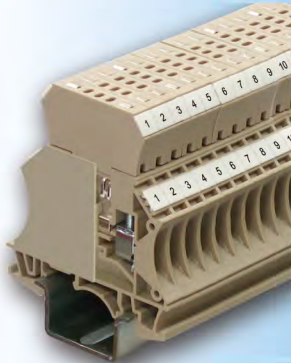

| 2.5 mm ² | | 4 mm ² | | 4 mm ² | |
|---|------|---------------------------------------|------|---------------------------------------|------|
| Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | |
| c  600 V/ 2A/AWG 12-22 | | 600 V/12 A/AWG 10-22 | | 600 V/ 2A/AWG 10-22 | |
| 600 V/ 2A/AWG 12-22 | | 600 V/12 A/AWG 10-22 | | 600 V/ 2A/AWG 10-22 | |
| 400 V/2 A/0.5~2.5mm ² | | 500 V/15 A/0.5~4mm ² | | 400 V/2 A/0.5~4mm ² | |
| 6 KV | | 6 KV | | 6 KV | |
| 4.5 | | 6 | | 6 | |
| M3 | | M3 | | M3 | |
| 10-12 mm | | 10-12 mm | | 10-12 mm | |
| Beige | | Beige | | Beige | |
| T / W / H (mm) | | T / W / H (mm) | | T / W / H (mm) | |
| 5 x 60 x 47.5 +18(CSD2.5) | | 6x 60 x 47.5 | | 6x 60 x 47.5 +18(CSD4) | |
| 5 x 60 x 55 +18(CSD2.5) | | 6 x 60 x 55 | | 6 x 60 x 55 +18(CSD4) | |
| Cat. No. | Qty. | Cat. No. | Qty. | Cat. No. | Qty. |
| SEW35 | 50 | SEW35 | 50 | SEW35 | 50 |
| CEW35/2 | 50 | CEW35/2 | 50 | CEW35/2 | 50 |
| CEP 1 | 50 | CEP 1 | 50 | CEP 1 | 50 |
| CEP 2 | 50 | CEP 5 | 50 | CEP 2 | 50 |
| CQB 2.5/2 | 50 | CQB 4/2 | 50 | CQB 4/2 | 50 |
| CQB 2.5/3 | 50 | CQB 4/3 | 50 | CQB 4/3 | 50 |
| CQB 2.5/10 | 20 | CQB 4/10 | 20 | CQB 4/10 | 20 |
| W5 W5Z W5K | 500 | W6 W6Z W6K | 500 | W6 W6Z W6K | 500 |
| W7 W7Z W7K | 400 | W8 W8Z W8K | 400 | W8 W8Z W8K | 400 |
| | | TPS2.0 (Ø2) | 20 | | |
| | | TPS2.3 (Ø2.3) | 20 | | |
| | | TP2.0 | 50 | | |
| | | TP2.3 | 50 | | |
| CSD2.5 | 25 | CSD4 | 25 | CSD4 | 25 |
| CSD2.5 | 25 | CSD4 | 25 | CSD4 | 25 |
| | | CSI4 | 25 | CSI4 | 25 |
| DP1 | 20 | DP1 | 20 | DP1 | 20 |
| AD2 | 50 | AD1 | 50 | AD2 | 50 |
| DS3 | | DS3 | | DS3 | |