



## Screw Disconnect Terminal Blocks



CTR 10

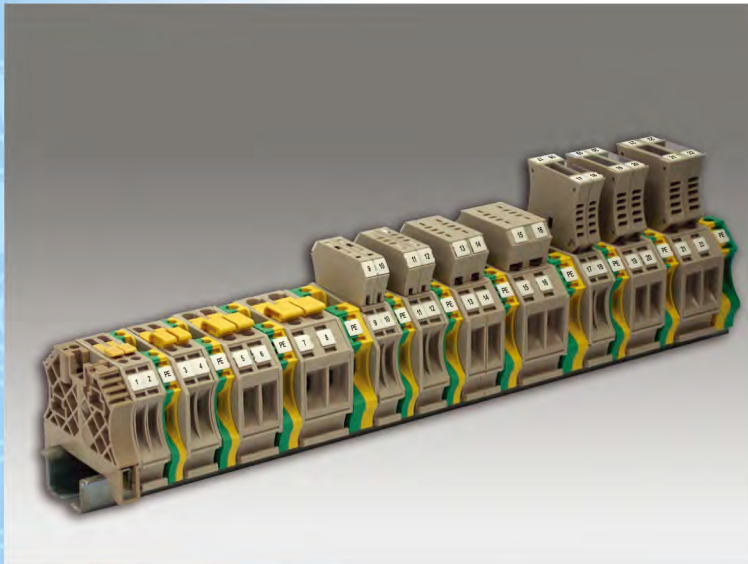






### Features of Fuse Terminal Blocks (CTR4SI/6SI/10 SI)


- Fuse terminal blocks can be used to fit fuses easily and quickly on the terminal rails (Ease of fault finding).
- Components as sensors, power supply units and conductors are protected by installing different fuses. (when the current flows through them).
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismantling from the terminal rail.

### 保險絲型接線座之特性 (CTR4SI/6SI/10SI)


- 保險絲安裝及更換容易(有利於故障診斷)
- 保護元件避免受電流衝擊而損毀
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)	10 mm <sup>2</sup>		
Technical Data (技術參數)	Rated voltage/Rated current/Wire size		
UL	600 V / 24A/AWG 12-22		
CSA	600 V / 24A/AWG 12-22		
IEC	630 V/24 A/1.5~10mm <sup>2</sup>		
Insulating impulse voltage withstand (額定衝擊電壓)	8 KV		
Torque (lb-in) (扭緊力矩)	19		
Clamping Screw (M) (螺絲)	M4		
Insulation stripping length(mm) (剝線長度)	12-14 mm		
Material/Available Color(材質顏色)	Beige		
Rail Dimensions (導軌尺寸)	T / W / H (mm)		
For TS35x7.5 	10x 60 x 47.5		
For TS35x15 	10 x 60 x 55		
Accessories (附件)	Cat. No.	Qty.	
End Bracket (終端擋板)	SEW35	50	
	CEW35/2	50	
End Plate (擋板)	CEP 5	50	
Partition (擋板/隔片)			
Comb Link (邊接式聯接件)	CQB 10/2	50	
	CQB 10/3	50	
	CQB 10/10	20	
Marking Tags (標記號)	W6 W6Z W6K	500	
	W8 W8Z W8K	400	
Test plug (測試插頭)			
Socket (測試插孔)			
Diode Plug (二極體插頭)	+  -	CSD10	25
	-  +	CSD10	25
LED Fuse Type (顯示型保險絲插座) Insert 	CSI10	25	
Protection Cover (防觸蓋)	DP1	20	
Retaining Plates (扣板/中界板)	AD1	50	
Tool (工具)	DS4		

**CTR 10D**



**CTR 10SI**

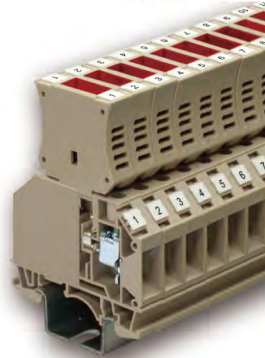

10 mm <sup>2</sup>		10 mm <sup>2</sup>	
Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
600 V/ 3A/AWG 12-22		400 V/ 20 A/AWG 6-16	
600 V/ 3A/AWG 12-22		400 V/ 20 A/AWG 6-16	
500 V/3 A/1.5~10mm <sup>2</sup>		500 V/20 A/1.5~10mm <sup>2</sup>	
8 KV		8 KV	
19		19	
M4		M4	
12-14 mm		12-14 mm	
Beige		Beige	
T / W / H (mm)		T / W / H (mm)	
10x 60 x 47.5 + 18(CSD10)		10 x 60 x 47.5 + 31.5(CSI10)	
10 x 60 x 55 + 18(CSD10)		10 x 60 x 55 + 31.5(CSI10)	
Cat. No.	Qty.	Cat. No.	Qty.
SEW35	50	SEW35	50
CEW35/2	50	CEW35/2	50
CEP 5	50	CEP 5	50
CEP 2	50	CEP 2	50
CQB 10/2	50	CQB 10/2	50
CQB 10/3	50	CQB 10/3	50
CQB 10/10	20	CQB 10/10	20
W6 W6Z W6K	500	W6 W6Z W6K	500
W8 W8Z W8K	400	W8 W8Z W8K	400
CSD10	25	CSD10	25
CSD10	25	CSD10	25
CSI10	25	CSI10	25
DP1	20		
AD2	50		
DS4		DS4	