




ME010A, ME010B PCB Connector, Header





Dimensions/Positions



		ME010A-508	ME010B-508
間距	Pitch	5.08mm	5.08mm
尺寸a	Dimension a	5.08mm	5.08mm
長度 A	Length	A= 5.08xP(P≥2)	A= 5.08xP(P≥2)
焊針	Pin Dimensions	Brass, Tin Plated	Brass, Tin Plated
塑膠本體	Housing Material	PA 66	PA 66
PCB孔徑	PCB Hole Diameter	1.5mm	1.5mm
環境作業溫度	Operating Temperature	-40°C to +105°C	-40°C to +105°C

TECHNICAL DATA

絕緣材料組	Insulating Material group	I	I
額定電涌電壓(III/3)	Rated surge voltage (III/3)	4 kV	4 kV
額定電涌電壓(III/2)	Rated surge voltage (III/2)	4 kV	4 kV
額定電涌電壓(II/2)	Rated surge voltage (II/2)	4 kV	4 kV
額定電壓(III/2)	Rated voltage(III/2)	320V	320V
額定電壓(II/2)	Rated voltage(II/2)	400V	400V
絕緣材料	Insulating Material	PA	PA
阻燃等級, 符合UL94	Inflammability class acc. to UL94	V0	V0
額定電壓, UL/CUL 標準B組	Nominal voltage, UL/CUL Use Group B	300V	300V
額定電流, UL/CUL 標準B組	Nominal current, UL/CUL Use Group B	16A	16A
額定電壓, UL/CUL 標準D組	Nominal voltage, UL/CUL Use Group D	300V	-
額定電流, UL/CUL 標準D組	Nominal current, UL/CUL Use Group D	10A	-

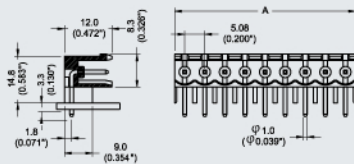

PCB Layout

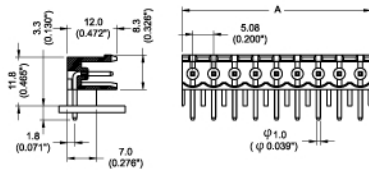

PCB Layout

